



We are professional manufacturer of UV printer for 13 years in China. Our factory occupies more than 18,000 square meters,with six professional production lines to support annually sales volume. There are professional R&D center and sales team for domestic and international sales, and after-sales service team for customers. Some agents and third-party after-sales service center to ensure timely service for our customers as well. We export our printers since 2012, with high quality, friendly service and competitive price, our printers are welcome in Asia, Europe, Australia and Africa etc.

As a professional manufacturer and exporter of UV flatbed printer in China, we have advanced manufacture center, stable parts supplier, consumables supplier and constantly updated technology department to provide excellent service and best price for our customers. Welcome to contact us for cooperation.



Company Floor Area 18000m²






Office Center 4000m²

Production Center 12000m²





Ricoh GEN5/GEN6 Printhead 2-8 units Color, white, varnish and 3D Embossing effect optional Glass/Ceramic/Decoration/ Advertising sign industry

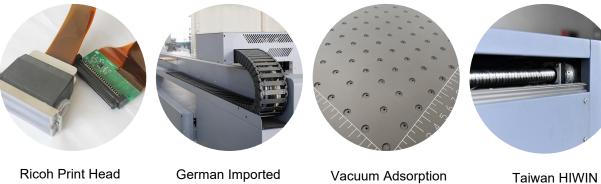

Towline

ion Taiwan HIWI Screw Rod

Platform

Product Model	YC2513L				
Printhead Type		RIC	OH GEN5/GEN6		
Printhead Number			2-8 heads		
Ink Characteristics		UV Cu	ıring Ink (VOC Free)	
Ink reservoirs	Refillat	ple on the fly	while printing/250	00ml per color	
LED UV Lamp	m	ore than 300	00-hours life made	e in Korea	
Printhead arrangement		СМҮК	LC LM W V Option	al	
Printhead Cleaning System		Autom	atic Cleaning Syste	m	
Guide Rail		TAIWAN	HIWIN/THK Optic	nal	
Working Table		V	acuum Sucking		
Printing Size		ź	2500*1300mm		
Print Interface		USB2.0/US	SB3.0/Ethernet Inte	rface	
Media Thickness	0-100mm				
	720X600dpi	720X600dpi 4PASS 15-33sqm/h			
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)	
Print Resolution& Speed	720X1200dpi	8PASS	8-18sqm/h	,	
Life of printed image		3 years(ou	utdoor),10years(inc	loor)	
File Format		TIFF, JPEG	,Postscript,EPS,PDF	etc.	
RIP Software		RIP/P	hotoprint optional		
Power Supply	220V 50/60Hz(10%)				
Power	3100W				
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%				
Machine Dimension	2.1*4.4*1.4mm				
Packing Dimension	4.6*2.3*1.65mm				
Weight			1200kg		
Warranty		12 months	exclude the consur	nables	





EPSON DX5/DX7/XP600/ TX800/I3200 Printhead 2-4 units RICOH GEN5 /TOSHIBA CE4 Printhead 2-8 units

Glass/Ceramic/Decoration/ Advertising sign industry



Epson Print Head



Vacuum Suction

RICOH/TOSHIBA Print Head



German Imported Towline

Product Model	YC2513H				
Printhead Type	EPSON	EPSON RICOH GEN5/TOSHIBA CE4 Optio			
Printhead Number	2-4 heads		2-8 heads		
Ink Characteristics		UV Curing I	nk (VOA Free)		
Ink reservoirs	Refillable o	n the fly while	printing 1000ml per color		
LED UV Lamp		more than 30	0000-hours life		
Printhead arrangement		CMYKW	V optional		
Printhead Cleaning System		Automatic Cl	eaning System		
Guide Rail		Taiwar	n HIWIN		
Working Table		Vacuum	n Sucking		
Printing Size		2500*1	300mm		
Print Interface	USB2.0/USB3.0/Ethernet Interface				
Media Thickness	0-100mm				
Life of printed image	3 years(outdoor),10years(indoor)				
File Format	TIFF, JPEG, Postscript, EPS, PDF etc.				
	720X600dpi 4PASS 4-16sqm/h				
	720X900dpi	6PASS	3-11sqm/h		
Print Resolution& Speed	720X1200dpi	8PASS	2-8sqm/h		
Life of printed image	3	/ears(outdooi	r),10years(indoor)		
File Format	TI	FF,JPEG,Posts	cript,EPS,PDF etc.		
RIP Software		RIP/Photop	print optional		
Power Supply		220V 50/	60Hz(10%)		
Power	3100W				
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%				
Machine Dimension	3.7*2.08*1.26m				
Packing Dimension	3.9*1.85*1.43m				
Weight		80	0kg		
Warranty	12 r	nonths exclud	le the consumables		

<<< YC2513R UV Flatbed with Roll to Roll Printer



Ricoh GEN5/GEN6 Printhead 2-8 units

Color, white, varnish and 3D Embossing effect optional


Glass/Ceramic/Decoration/ Advertising sign industry



Ricoh Print Head



German Imported Towline



Top Heavy Rubber Roller Vacuum Adsorption

Platform

Product Model	YC2513R				
Printhead Type		RI	COH GEN5/GEN6		
Printhead Number			2-8 heads		
Ink Characteristics		UV C	uring Ink (VOC Free)		
Ink reservoirs	F	Refillable on the f	ly while printing 2500m	l per color	
LED UV Lamp		more than 30	000-hours life made in	Korea	
Printhead arrangement		CMY	LC LM W V Optional		
Printhead Cleaning System		Autor	natic Cleaning System		
Guide rail		TAIWA	N HIWIN/THK Optional		
Working Table			Vacuum Sucking		
Printing Size			2500*1300mm		
Roller Material Width			2500mm		
Roller Material Diameter			200mm		
Print Interface		USB2.0/L	JSB3.0/Ethernet Interfac	ce	
Media Thickness			0-100mm		
-	720X600dpi	4PASS	15-33sqm/h		
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)	
Print Resolution& Speed	720X1200dpi	8PASS	8-18sqm/h		
Life of printed image		3 years(c	outdoor),10years(indoor	r)	
File Format		TIFF,JPE	G,Postscript,EPS,PDF etc	2.	
RIP Software		RIP/	Photoprint optional		
Power Supply	220V 50/60Hz(10%)				
Power	8500W				
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%				
Machine Dimension			4.57*2.98*1.46m		
Packing Dimension	5*2.25*1.55m 3.2*0.85*1.1m				
Weight			2000kg		
Warranty	12 months excl	ude the consuma	bles related to ink, such	n as ink filter, damper etc	

**** UV Flatbed with Roll to Roll Printer



Ricoh GEN5/GEN6 Printhead 2-8 units

Color, white, varnish and 3D Embossing effect optional

Glass/Ceramic/Decoration/ Advertising sign industry



Ricoh Print Head



Negative Pressure Display



Top Heavy Rubber Roller Vacuum Adsorption

Platform

Product Model	YC3321R				
Printhead Type		RI	COH GEN5/GEN6		
Printhead Number			2-8 heads		
Ink Characteristics		UV C	Curing Ink (VOC Free)		
Ink reservoirs	F	Refillable on the f	ly while printing 2500m	l per color	
LED UV Lamp		more than 30	000-hours life made in	Korea	
Printhead arrangement		CMY	LC LM W V Optional		
Printhead Cleaning System		Autor	natic Cleaning System		
Guide rail		TAIWA	N HIWIN/THK Optional		
Working Table		,	Vacuum Sucking		
Printing Size			3300*2100mm		
Roller Material Width			3300mm		
Roller Material Diameter			200mm		
Print Interface		USB2.0/L	JSB3.0/Ethernet Interfac	ce	
Media Thickness			0-100mm		
	720X600dpi	4PASS	15-33sqm/h	_	
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)	
Print Resolution& Speed	720X1200dpi	8PASS	8-18sqm/h		
Life of printed image		3 years(c	outdoor),10years(indoor)	
File Format		TIFF,JPE	G,Postscript,EPS,PDF etc	2.	
RIP Software		RIP/	Photoprint optional		
Power Supply	220V 50/60Hz(10%)				
Power	8500W				
Operation Environment		Temperature 20	0 to 30°C,Humidity 40%	to 60%	
Machine Dimension	5.37*3.78*1.46m				
Packing Dimension	5.55*2.25*1.67m 4.3*0.85*1.22m				
Weight			3000kg		
Warranty	12 months excl	ude the consuma	bles related to ink, such	n as ink filter, damper etc	





EPSON DX5/DX7/ XP600/TX800/I3200 Printhead 2-4 units RICOH GEN5/GEN5i /TOSHIBA CE4 Printhead 2-8 units

Glass/Ceramic/Decoration/ Advertising sign industry





Epson Print Head

RICOH/TOSHIBA Print Head



High Precision Mute

Linear Guide Rail



Sectional Vacuum Suction Platform

	-				
Product Model	YC1610				
Printhead Type	EPSON	EPSON RICOH GEN5i/GEN5/TOSHIBA CE4 Option			
Printhead Number	2-4 heads	2-8 head	S		
Ink Characteristics	UV C	uring Ink (VOA Free)			
Ink reservoirs	Refillable on the fl	y while printing/1000ml per	color		
LED UV Lamp	more	than 30000-hours life			
Printhead arrangement	CI	/YKW V Optional			
Printhead Cleaning System	Auton	natic Cleaning System			
Guide Rail		Taiwan HIWIN			
Working Table	١	/acuum Sucking			
Printing Size	1600*1000mm				
Print Interface	USB2.0/U	SB3.0/Ethernet Interface			
Media Thickness		0-100mm			
	720X720dpi 4PASS 4-16sqm				
	720X1080dpi 6PASS 3-11sq				
Print Resolution& Speed	720X1440dpi	8PASS	2-8sqm/h		
Life of printed image	3 years(outdoor),10years(indoor)				
File Format	TIFF,JPEG,Postscript,EPS,PDF etc.				
RIP Software	RIP/Photoprint optional				
Power Supply	220V 50/60Hz(10%)				
Power	3100W				
Operation Environment	Temperature 20	to 30°C,Humidity 40% to 6	0%		
Warranty	12 months	exclude the consumables			





Ricoh GEN5/GEN6 Printhead 2-8 units Color, white, varnish and 3D Embossing effect optional

Glass/Ceramic/Decoration/ Advertising sign industry



Ricoh Print Head



German Imported Towline



Panasonic Servo Motors And Drives Platform

Product Model	YC2030L					
Printhead Type		RICOH GEN	15/GEN6			
Printhead Number		2-8 he	ads			
Ink Characteristics		UV Curing Ink	(VOC Free)			
Ink reservoirs	Refillable o	n the fly while p	rinting/2500ml pe	r color		
LED UV Lamp	more t	han 30000-houi	rs life made in Kore	ea		
Printhead arrangement		CMYK LC LM V	V V Optional			
Printhead Cleaning System		Automatic Clea	ining System			
Guide Rail	1	AIWAN HIWIN	/THK Optional			
Working Table		Vacuum S	Sucking			
Printing Size		2000*30	00mm			
Print Interface	US	B2.0/USB3.0/Et	hernet Interface			
Media Thickness		0-100mm				
	720X600dpi	4PASS	15-33sqm/h			
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)		
Print Resolution& Speed	720X1200dpi	8PASS	8-18sqm/h			
Life of printed image	3	years(outdoor),	10years(indoor)			
File Format	TI	FF, JPEG, Postscri	pt,EPS,PDF etc.			
RIP Software		RIP/Photopri	nt optional			
Power Supply		220V 50/60)Hz(10%)			
Power	3100W					
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%					
Machine Dimension	4*3.6*1.45m					
Packing Dimension	4.04*2.2*1.24m 3.66*0.7*0.8m					
Weight		1500	kg			
Warranty	12 r	nonths exclude	the consumables			





Specification

Product Model	YC2030H				
Printhead Type	EPS	SON	RICOH GEN5/TOSHIBA CE4 Optional		
Printhead Number	2-41	neads	2-8 heads		
Ink Characteristics		UV Curing	g Ink (VOA Free)		
Ink reservoirs	Refilla	able on the fly wh	ile printing 1000ml per color		
LED UV Lamp		more than	30000-hours life		
Printhead arrangement		СМҮК	W V optional		
Printhead Cleaning System		Automatic	Cleaning System		
Guide Rail		Таім	van HIWIN		
Working Table		Vacu	um Sucking		
Printing Size		2000	0*3000mm		
Print Interface		USB2.0/USB3.	0/Ethernet Interface		
Media Thickness	0-100mm				
Life of printed image	3 years(outdoor),10years(indoor)				
File Format		TIFF,JPEG,Pos	stscript,EPS,PDF etc.		
	720X600dpi	4PASS	4-16sqm/h		
	720X900dpi	6PASS	3-11sqm/h		
Print Resolution& Speed	720X1200dpi	8PASS	2-8sqm/h		
Life of printed image		3 years(outdo	oor),10years(indoor)		
File Format		TIFF, JPEG, Pos	stscript,EPS,PDF etc.		
RIP Software		RIP/Phot	oprint optional		
Power Supply	220V 50/60Hz(10%)				
Power	3100W				
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%				
Machine Dimension	3.7*3.35*1.3m				
Packing Dimension	3.65*0.7*0.78m 3.9*2.25*1.18m				
Weight			1000kg		
Warranty		12 months excl	ude the consumables		

Epson Print Head

RICOH/TOSHIBA Print Head High Precision Mute Linear Guide Rail

Sectional Vacuum Suction Platform

VC3321L UV FLATBED PRINTER



Ricoh GEN5/GEN6 Printhead 2-8 units Color, white, varnish and 3D Embossing effect optional

Hard Anodized

Vacuuming Platform


Glass/Ceramic/Decoration/ Advertising sign industry



Ricoh Print Head



German Imported Towline



High Precision Mute Linear Guide Rail

Product Model	YC3321L				
Printhead Type	RICOH GEN5/GEN6				
Printhead Number			2-8 heads		
Ink Characteristics		UV	Curing Ink (VOC Free)	
Ink reservoirs	Re	fillable on the	fly while printing/250	00ml per color	
LED UV Lamp		more than 3	0000-hours life made	e in Korea	
Printhead arrangement		CMY	K LC LM W V Option	al	
Printhead Cleaning System		Auto	matic Cleaning Syste	m	
Guide Rail		TAIWA	N HIWIN/THK Optio	nal	
Working Table			Vacuum Sucking		
Printing Size			3300*2100mm		
Print Interface	USB2.0/USB3.0/Ethernet Interface				
Media Thickness	0-100mm				
	720X600dpi	4PASS	15-33sqm/h		
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)	
Print Resolution& Speed	720X1200dpi	8PASS	8-18sqm/h		
Life of printed image		3 years(outdoor),10years(ind	loor)	
File Format		TIFF,JPE	G,Postscript,EPS,PDF	etc.	
RIP Software		RIP	/Photoprint optional		
Power Supply		2	20V 50/60Hz(10%)		
Power			3100W		
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%				
Machine Dimension	5.3*4.1*1.65m				
Packing Dimension	5.52*2.25*1.55m 4.3*0.85*1.1m				
Weight			1800kg		
Warranty		12 month	s exclude the consur	nables	





Specification

Product Model	YC6090				
Printhead Type	EPSON RICOH GEN5i/TOSHIBA CE4 Optional				
Printhead Number	2-4 heads		2-8 heads		
Ink Characteristics		UV Curi	ng Ink (VOA Free)		
Ink reservoirs	Refillable or	n the fly w	vhile printing 1000ml per color		
LED UV Lamp		more tha	n 30000-hours life		
Printhead arrangement		CMY	KW V optional		
Printhead Cleaning System		Automati	ic Cleaning System		
Guide Rail		Та	iwan HIWIN		
Working Table		Vac	uum Sucking		
Printing Size		9	00*600mm		
Print Interface	USB2.0/USB3.0/Ethernet Interface				
Media Thickness	0-100mm				
Life of printed image	3 y	/ears(outo	door),10years(indoor)		
File Format	TIFF, JPEG, Postscript, EPS, PDF etc.				
	720X600dpi	4PASS	4-16sqm/h		
	720X900dpi	6PASS	3-11sqm/h		
Print Resolution& Speed	720X1200dpi	8PASS	2-8sqm/h		
Life of printed image	3 y	/ears(outo	door),10years(indoor)		
File Format	TI	FF,JPEG,Po	ostscript,EPS,PDF etc.		
RIP Software		RIP/Pho	otoprint optional		
Power Supply		220V	50/60Hz(10%)		
Power	3100W				
Operation Environment	Temperature 20 to 30°C,Humidity 40% to 60%				
Machine Dimension	1060*2100*1160mm				
Packing Dimension		2435*	1225*1335mm		
Weight			400kg		
Warranty	12 n	nonths ex	clude the consumables		

Epson Print Head

RICOH/TOSHIBA Print Head Vacuum Suction

Aluminum Beam

KKK YC2500HR UV HYBRID PRINTER




Ricoh GEN5/GEN6 Printhead 2-8 units Color, white, varnish and 3D Embossing effect optional

Shelf Platform

Glass/Ceramic/Decoration/ Advertising sign industry



Ricoh Print Head



High Qulity Big Steel Roller




Print Head Heating

Product Model	YC2500HR				
Printhead Type	RICOH GEN5/GEN6				
Printhead Number		2-8	3 units		
Ink Characteristics		UV Curing	nk (VOC Free)		
Lamp		UV L	ED lamp		
Printhead Arrangement		C MYKLC	LM W V optional		
Guide Rail		TAIWA	AN HIWIN		
Working Table	Anodized	aluminum wit	h 4-section vacuu	m sucking	
Printing Width		25	00mm		
Coiled Media Diameter		20)0mm		
Media Weight		100	kg Max		
Print Interface		USB2.0/USB3.0,	/Ethernet Interfac	e	
Media Thickness	0-	100mm, highe	r can be customiz	ed	
	720X600dpi	4PASS	15-33sqm/h		
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)	
Print Resolution & Speed	720X1200dpi	8PASS	8-18sqm/h		
RIP Software		RIP/Photo	print optional		
Media	Wallpaper, flex banne	er, glass, acrylic oard, corrugate	, wood board, cer ed board, plastic e	amic, metal plate, PVC etc.	
Media Handling		Automatic R	elease/Take Up		
Machine Dimension		4770*16	90*1440mm		
Weight	2500kg				
Safety Certification	CE Certificate				
Image Format	TIFF,JPEG,Postscript,EPS,PDF etc.				
Input Voltage	Single Phase 220V±10%(50/60Hz,AC)				
Working Environment	Temper	ature: 20°C-28°	°C Humidity: 40%	-70% RH	
Warranty	12 months exclude the	consumables re	elated to ink, such	n as ink filter, damper etc	






Ricoh GEN5/GEN6 Printhead 2-8 units Color, white, varnish and 3D Embossing effect optional Glass/Ceramic/Decoration/ Advertising sign industry



Ricoh Print Head



High Qulity Big Steel Roller




Shelf Platform

lity Roller



Print Head Heating

Product Model	YC3200HR				
Printhead Type	RICOH GEN5/GEN6				
Printhead Number			2-8 units		
Ink Characteristics		UV Curi	ng Ink (VOC Free)		
Lamp		U	V LED lamp		
Printhead Arrangement	(СМҮК	LC LM W V optional		
Guide Rail		TA	IWAN HIWIN		
Working Table	Anodized a	aluminum	with 4-section vacuur	n sucking	
Printing Width			3200mm		
Coiled Media Diameter			200mm		
Media Weight			80kg Max		
Print Interface	U	SB2.0/USE	33.0/Ethernet Interface	9	
Media Thickness	0-1	00mm, hi	gher can be customize	ed	
	720X600dpi	4PASS	15-33sqm/h		
	720X900dpi	6PASS	10-22sqm/h	(GEN6 40% faster than this speed)	
Print Resolution & Speed	720X1200dpi	8PASS	8-18sqm/h		
RIP Software		RIP/Ph	otoprint optional		
Media	Wallpaper, flex banner, gla	ass, acrylic corrugate	, wood board, ceramic ed board, plastic etc.	, metal plate, PVC board,	
Media Handling		Automa	tic Release/Take Up		
Machine Dimension		5610	*1720*1520mm		
Weight	3000kg				
Safety Certification	CE Certificate				
Image Format	TIFF,JPEG,Postscript,EPS,PDF etc.				
Input Voltage	Sin	Single Phase 220V±10%(50/60Hz,AC)			
Working Environment	Tempera	ture: 20°C	-28°C Humidity: 40%-	70% RH	
Warranty	12 months exclude the co	onsumabl	es related to ink, such	as ink filter, damper etc	

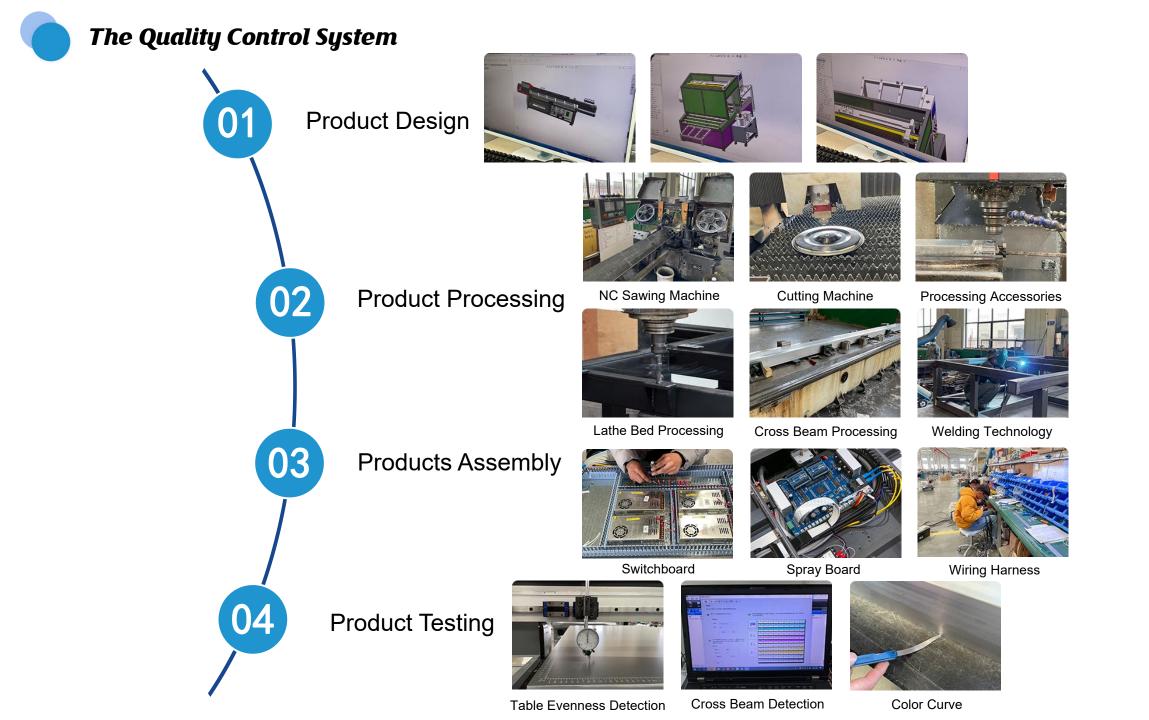

The Three Major Safeguard



One Year Warranty

Important parts, warranty for one year.

Free Replacement

Within the warranty period, free replacement of damaged parts caused by quality problems.

Intimate After-sales

At least three times a year after sales return visit, keep track of the machine use.



TEL:008613503831890(China) 00919825073543(India)

Email:lulu19870907@hotmail.com parasinternational47@gmail.com Web:www.parasinternational.in

Add:Floor No.1,Courtyard No.87, Jinhai Road, Erqi District,Zhengzhou City, China